


F SERIES**W1-2025SA**

1" ALUM, FULL RANGE

- THE HIGHEST PERFORMANCE OF INNOVATIVE, TINY FULL RANGE DRIVER DESIGN
- OUTSIDE DIAMETER OF 40mm, Fo:200Hz
- ALUMINUM DIAPHRAGM WITH SANTOPRENE SURROUND
- NEODYMIUM MAGNET SYSTEM
- PATENTED PRODUCT WITH EXCELLENT CONSISTENCY
- IT'S GOOD FOR MULTIMEDIA APPLICATION

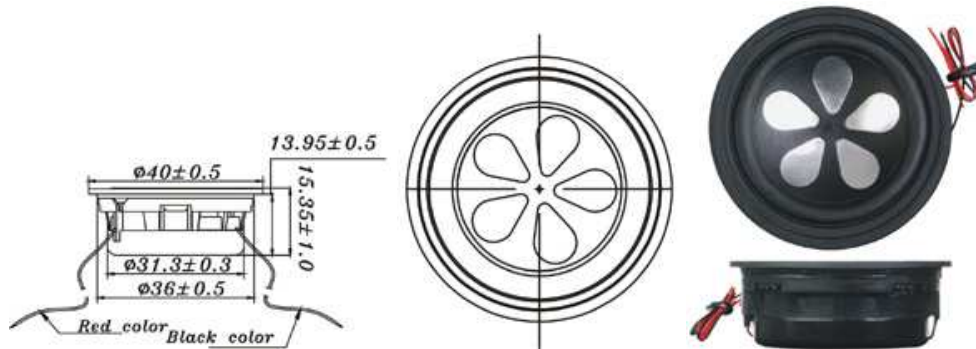

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

DIAPHRAGM MTL	Aluminium
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1m	81 dB
FREQUENCY RESPONSE	200-20K Hz
FREE AIR RESONANCE	200 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	3.0 mm
RATED POWER INPUT	2 W
MAXIMUM POWER INPUT	4 W
FORCE FACTOR, BL	2.14 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	0.523 g
FERRO FLUID ENHANCED	YES
SUSPENSION COMPL.	1005 uMN ⁻¹
EFFEC.PISTON AREA	0.0006 M ²
Levc	0.02 mH
Zo	18 ohm
X-max	0.75 mm
Vas	0.05 Litr.
Qts	0.46
Qms	2.39
Qes	0.57

CLOSE