

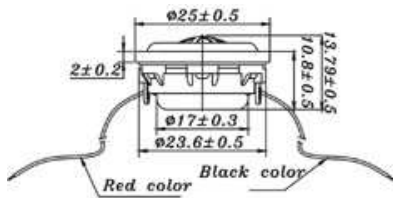


F SERIES**W1-1925SB**

1" PP CONE, FULL RANGE

- THE HIGHEST PERFORMANCE OF INNOVATIVE, TINY FULL RANGE DRIVER DESIGN
- OUTSIDE DIAMETER OF 25mm, Fo:200Hz
- PP CONE WITH SANTOPRENE SURROUND
- NEODYMIUM MOTOR SYSTEM
- PATENTED PRODUCT WITH EXCELLENT CONSISTENCY
- IT'S GOOD FOR MULTIMEDIA APPLICATION

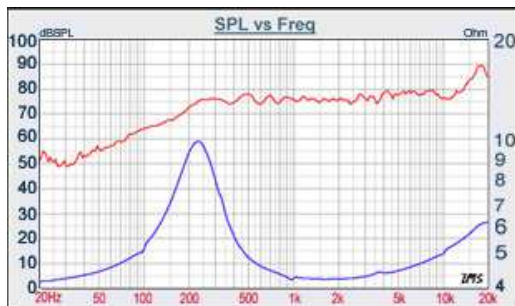

| | |
|----------------------|--------------------------|
| DIAPHRAGM MTL | Mineral filled PP |
| SURROUND MTL | Santoprene |
| NOMINAL IMPEDANCE | 4 Ω |
| DCR IMPEDANCE | 3.5 Ω |
| SENSITIVITY 1W/1m | 75 dB |
| FREQUENCY RESPONSE | 220-20K Hz |
| FREE AIR RESONANCE | 220 Hz |
| VOICE COIL DIAMETER | 13.28 mm |
| AIR GAP HEIGHT | 1.5 mm |
| RATED POWER INPUT | 1 W |
| MAXIMUM POWER INPUT | 2 W |
| FORCE FACTOR, BL | 1.12 TM |
| MAGNET WEIGHT (oz) | Neodymium |
| MOVING MASS | 0.20 g |
| FERRO FLUID ENHANCED | Yes |
| SUSPENSION COMPL. | 2399 μMN^{-1} |
| EFFEC.PISTON AREA | 0.00023 M^2 |
| Levc | 0.008 mH |
| Zo | 10 ohm |
| X-max | 0.75 mm |
| Vas | 0.018 Litr. |
| Qts | 0.54 |
| Qms | 0.61 |
| Qes | 0.82 |

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

CLOSE